




SCREWED END PISTON CHECK VALVE

FEATURES



- 1/4"~3" (DN8~DN80)
- W.P. : 800 WOG (PN50)
- W.T. : -20°C~200°C (-4°F~392°F)
- Investment casting

- Thread type : ASME B1.20.1 (NPT)
DIN2999 & BS21
ISO7/1 & EN10226

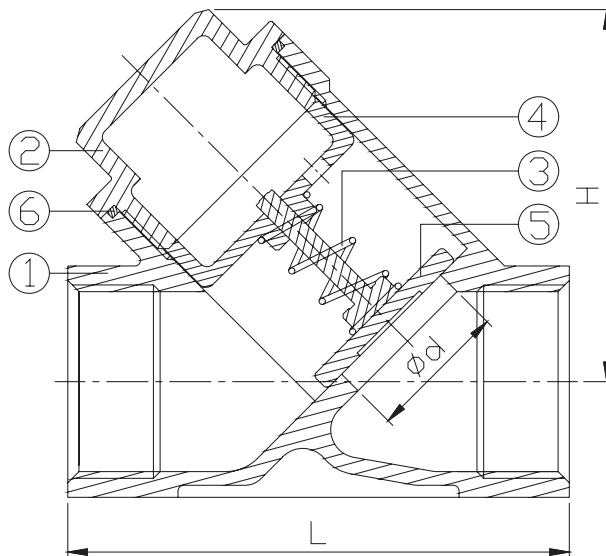

ITEM	PARTS	MATERIAL
1	BODY	ASTM A351-CF8M
2	BONNET	
3	SPRING	AISI 316 / AISI 304
4	SCREW	AISI 316
5	DISC	
6	SEAL	PTFE

DN	d	L	H
8	15	65	46.5
10	15	65	46.5
15	15	65	46.5
20	20	80	68.5
25	25	90	71
32	32	105	74
40	38	120	82.5
50	50	140	95
65	65	180	121.3
80	80	200	138.3

unit:mm

NPS	d	L	H
1/4"	0.59	2.56	1.83
3/8"	0.59	2.56	1.83
1/2"	0.59	2.56	1.83
3/4"	0.79	3.15	2.7
1"	0.98	3.54	2.8
1-1/4"	1.26	4.13	2.91
1-1/2"	1.5	4.72	3.25
2"	1.97	5.51	3.74
2-1/2"	2.56	7.09	4.78
3"	3.15	7.87	5.44

unit:in

Add:Shacheng Industrial Park ,Longwan District,Wenzhou City 325025,
ZheJiang Province,China

Tel/Fax: +86-577-8986-3679 Mobile : +86 189 5773 1879

<http://www.cncxvalve.com>

Email:sales@cncxvalve.com