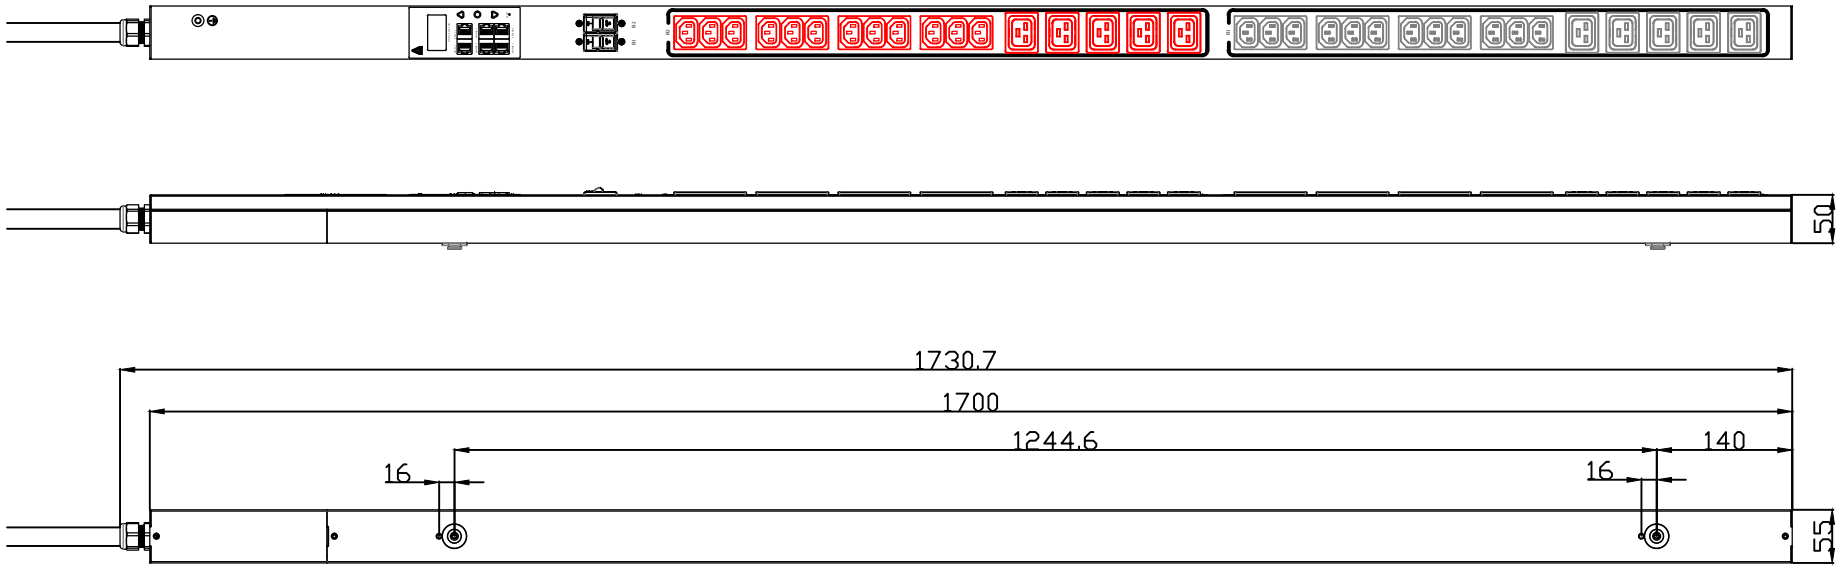

Config Table		
SKU#	Power Cord Length	Plug
AP21004	–	–
AP21004-20	6mm^2x3, 2M	–
AP21004-20P	6mm^2x3, 2M	IEC309 32A 3P6H IP44



IEC609 PLUG
IP44 32A 3P6H

PUD Series: Basic Meter
Input: 200-240V AC, 32A, 1Ph
Outlet: C13 [24], C19 [10].
CB/Bank: 16A/1P [2], 2xBank
Outlet Color: Black/Red
Chassics Color: Black

Toleranss/Tolerance ISO 2768-M

>400=1000	±0.8
>120=400	±0.5
>30=120	±0.3
>6=30	±0.2
>3=6	±0.1
>0.5=3	±0.1

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF A-RACK AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM A-RACK. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

Drawn by	Description: Basic Meter PDU, 200-240V AC, 32A, 1Ph C13 [24], C19 [10]	Drawing No. AP21004	
Approved by			
RakworX	Version A1	Third Angle Projection	Unit: mm
	Scale: 1:-	A4	Sheet:1 OF 1