

# KKCB-П-1,5+2x0.75,Figure 8

## 75 Ohm CCTV coaxial Cable

### NO.7102216



#### Construction Parameters:

Inner Conductor	0.25mmCu
Dielectric	1.6mm Solid Polyethylene
Shield	64×0.12mmCCA(90%)
Jacket	3.1mm PVC
Power Wire Conductor	2x(16x0.25mmCCA ) Stranded
Power wire Diameter of insulator	2.0mm PVC (Red,Black)
Jacket	5.0mm PVC Common
Application	For Use in Longer CCTV Run Lengths



#### Electrical Characteristics:


Inner Conductor Resistance	The Max. at 20°C shall be < 350 Ω/km
Capacitance	68 ±3 pF/m
Impedance	75 ± 5Ω
Return loss	20dB
Velocity of Propagation	0.82
Sparker Test (VAC)	3

#### Mechanical and Environmental Properties

Cable bend radius	10 times the cable diameter
Operating Temp Range	-20 °C to 60°C
Cable dimensions	3.1×5.0mm

#### Cross Section

### KKCB-П-1,5+2x0.75,Figure 8

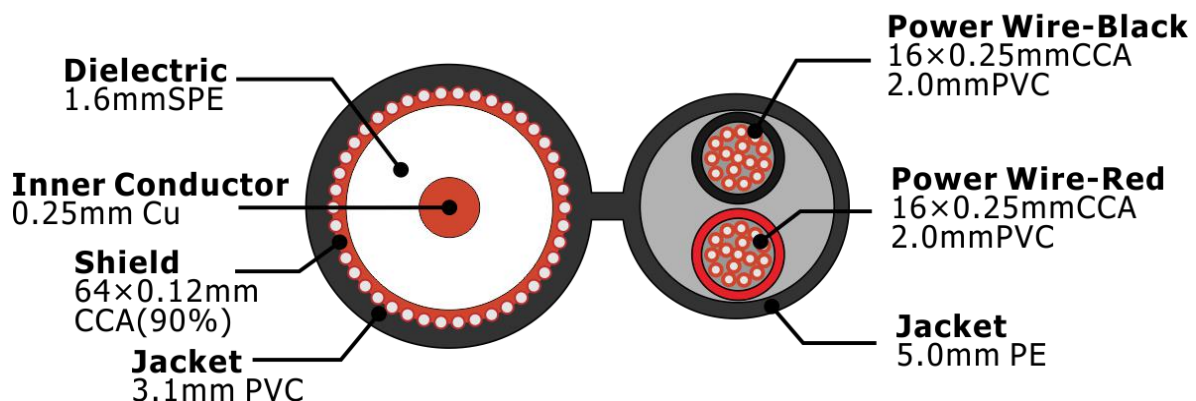

---

## Attenuation(20°C):

Frequency (MHZ)	Max Attenuation(dB/100ft)	Max Attenuation (dB/100m)
5		5.21
50		16.45
100		23.23
300		40.22
450		49.26
865		68.28
1000		73.42
1750		97.12
2150		107.70
2500		116.07
3000		127.15

---

## Order Informations:

Marking	HELLOSIGNAL KKCB-П-1,5+2x0.75,Figure 8 CCTV COAXIAL CABLE 7102216 ×××M/FT
Package	Inquired Length on Reel,Pull Box,Plastic Spool,wooden Spool,pallet
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

---

## Online Service:

Skype	kingtone3
ICQ	246632889
Whatsapp	0086 18268009191
Email	michael@zion-communication.com



**www.zion-communication.com**  
**HANGZHOU ZION COMMUNICATION CO.,LTD**