

RG59 BC 95% BC PVC CMP

75 Ohm CCTV coaxial Cable

NO.7100163



Construction Parameters:

Inner Conductor	0.032"/0.81mm/20 AWG BC
Dielectric	0.135"/3.43mm Foamed FEP
Shield 1	/
Shield 2	0.12mm Bare Copper braid wire 95% coverage
Jacket	0.193"±0.006"/4.90±0.15mm PVC CMP
Jacket Thickness	0.032"/0.81mm
Application	For Use in Longer CCTV Run Lengths

Electrical Characteristics:

Inner Conductor Resistance	The Max. at 20°C shall be < 33.4 Ω/km 10.2Ω/1000ft
Capacitance	52 ±3 pF/m 15.8 ±1 pF/ft
Impedance	75 ± 3 Ω
Return loss	between 5 and 1000MHz: > 22dB
Velocity of Propagation	0.85
Sparker Test (VAC)	4




Mechanical and Environmental Properties

Cable bend radius	10 times the cable diameter
Operating Temp Range	-20 °C to 60°C
Cable diamensions	0.193"±0.006"/4.90±0.15mm PVC CMP

Cross Section

RG/U BC 95% BC PVC CMP

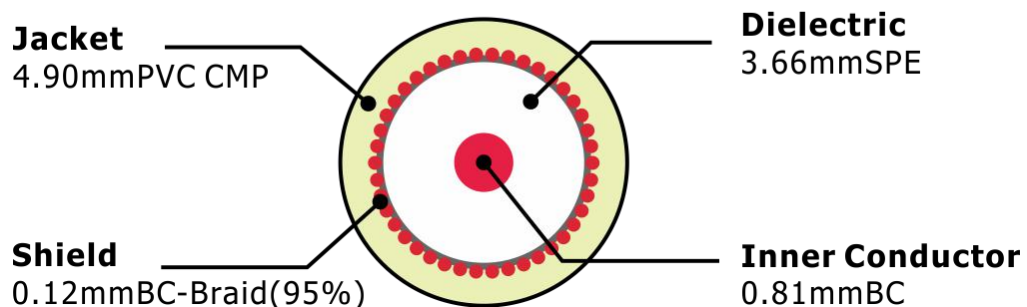

Attenuation(20°C):

Frequency (MHZ)	Max Attenuation(dB/100ft)	Max Attenuation (dB/100m)
1	0.30	0.98
10	0.95	3.11
100	2.95	9.67
200	4.50	14.75
400	6.80	22.30
700	9.67	31.70
900	10.60	34.75
1000	11.47	37.61

Order Informations:

Marking	HELLOSIGNAL RG59 BC 95% BC PVC CCTV COAXIAL CABLE 7100163 ×××M/FT
Package	Inquired Length on Reel,Pull Box,Plastic Spool,wooden Spool,pallet
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

Online Service:

Skype	kingtone3
ICQ	246632889
Whatsapp	0086 18268009191
Email	michael@zion-communication.com



www.zion-communication.com
HANGZHOU ZION COMMUNICATION CO.,LTD