

# KKCB-Π-2Э+2x0.50, Figure 8

## 75 Ohm CCTV coaxial Cable

### NO.7102217



#### Construction Parameters:

Inner Conductor	0.37mmCu
Dielectric	2.3mm Solid Polyethylene
Shield	32×0.12mmCCA(45%)
Jacket	3.8mm PVC
Power Wire Conductor	2x(11x0.25mmCCA )
Power wire Diameter of insulator	1.8mm PVC (Red,Black)
Jacket	4.6mm PVC Common
Application	For Use in Longer CCTV Run Lengths



#### Electrical Characteristics:


Inner Conductor Resistance	The Max. at 20°C shall be < 166.48 Ω/km
Capacitance	68±1 pF/m
Impedance	75±5 Ω
Return loss	20dB
Velocity of Propagation	0.66
Sparker Test (VAC)	3

#### Mechanical and Environmental Properties

Cable bend radius	10 times the cable diameter
Operating Temp Range	-20 °C to 60°C
Cable dimensions	3.8×4.6mm

#### Cross Section

### KKCB-Π-2Э+2x0.50, Figure 8

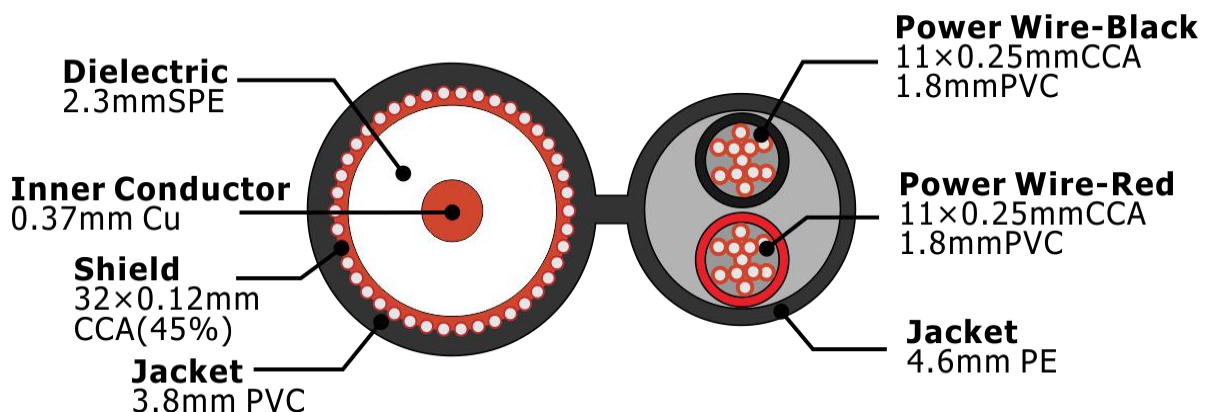

---

## Attenuation(20°C):

Frequency (MHZ)	Max Attenuation(dB/100ft)	Max Attenuation (dB/100m)
5		3.69
50		11.62
100		16.50
300		28.42
450		34.81
865		48.25
1000		51.88
1750		68.62
2150		76.06
2500		82.01
3000		89.84

---

## Order Informations:

Marking	HELLOSIGNAL KKCB-П-2Э+2x0.50, Figure 8 CCTV COAXIAL CABLE 7102217 x x x M/FT
Package	Inquired Length on Reel,Pull Box,Plastic Spool,wooden Spool,pallet
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

---

## Online Service:

Skype	kingtone3
ICQ	246632889
Whatsapp	0086 18268009191
Email	michael@zion-communication.com



**www.zion-communication.com**  
**HANGZHOU ZION COMMUNICATION CO.,LTD**